

Ultra Black

375-390 W

*Fundamentally different.
And much better.*



Ultra Black Solar Cell Technology

Eliminates the color difference on the solar panels and increase the effectiveness of the panels by up to 5%



DLAR Glass Coating Technology

Boosting solar glass transmission and therefore increase panel efficiency by up to 5%




Bloomberg Tier 1 Production

Both the Belinus solar cells and solar modules are produced by certified suppliers in the 2021



European Quality

Each Belinus panels are made by certified materials and they go through rigorous three steps European quality assurance process

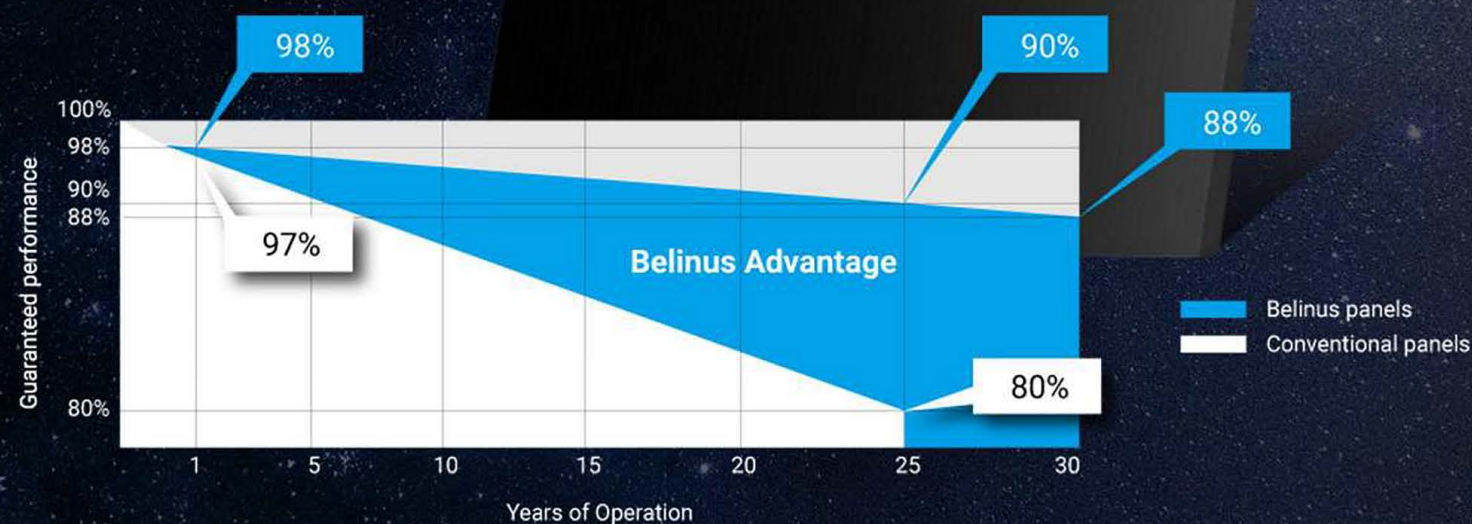

30 yr
Product
warranty

30 yr
Performance
warranty

30 yr
Service
warranty


Kapeldreef 60
3001 Leuven, Belgium
+32 (0) 16 91 03 14
info@belinus.be

"The most comprehensive warranty in the entire solar industry."

www.belinus.be

MECHANICAL SPECIFICATION

Solar Cell	Monocrystalline silicon 166 mm
No. of Cells	120 (6 × 20)
Dimension	1755 × 1038 × 35mm ± 1.5 mm
Weight	19.5 kg
Front Glass	3.2 mm with DLAR coating technology
Frame	Anodized aluminium alloy
Output Cables	4.0 mm ² , 1200mm
Junction box	IP68 rated
Connection technology	Stäubli Electrical MC4-connectors

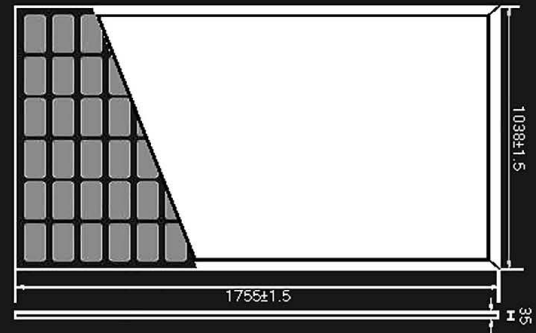

ELECTRICAL CHARACTERISTIC

STC	375	380	385	390
Maximum Power at STC (P _{max})	375	380	385	390
Optimum Operating Voltage (V _{mp})	34.2V	34.3V	34.4V	34.5V
Optimum Operating Current (I _{mp})	10.98A	11.09A	11.20A	11.31A
Open Circuit Voltage (V _{oc})	41.6V	41.7V	41.8V	41.9V
Short Circuit Current (I _{sc})	11.85A	11.98A	12.10A	12.22A
Module Efficiency	20.6%	20.9%	21.2%	21.5%
Operating Module Temperature	-40 °C to +85 °C			
Maximum System Voltage	1500 V DC (IEC)			
Maximum Series Fuse Rating	20 A			
Power Tolerance	0 / + 5 W			

STC: Irradiance 1000 W/m², module temperature 25 °C, A/M=1.5; Tolerances of P_{max}, V_{oc} and I_{sc} are all within +/- 5%

TEMPERATURE CHARACTERISTICS

Nominal Module Operating Temperature (NMOT)	45 °C	Temperature Coefficient of V _{oc}	-0.29 %/°C
Temperature Coefficient of P _{max}	-0.37 %/°C	Temperature Coefficient of I _{sc}	0.05%/°C

QUALIFICATIONS AND CERTIFICATES



PACKAGING INFORMATION

Container	40'HC
Pieces per pallet	88
Pallets per container	26
Pieces per container	858

Note: Both the Belinus solar cells and solar modules are made by suppliers in the 2021 Bloomberg Tier 1 List



Belinus All-In-One Warranty	vs	Conventional Solar Panel Warranty
	Service Warranty	
✓	Shipping - new part	✗
✓	Shipping - old part	✗
✓	Intallation	✗
30 years	Product Warranty	10 years
	Power Warranty	
98%	Start point	97%
0.34%	Yearly decline	0.7%
90%	End point (25 years)	80%
88%	End point (30 years)	✗

BE-DSH2021 V5

All rights reserved. Subject to change. Errors excepted.

belinus DESIGNED AND
ENGINEERED IN BELGIUM

Kapeldreef 60, 3001 Leuven, Belgium | TEL +32 (0) 16 91 03 14 | EMAIL info@belinus.be | WEB www.belinus.be



www.energreen.be

Tel: 010 45 13 73
Fax: 010 45 90 73
info@energreen.be
Av. Franklin 5C
1300 Wavre